


# Single Window Flashings

Keylite Flashing Kits are the most efficient way to ensure a watertight installation for your windows and have been designed to integrate efficiently with specific roofing materials.

## Tile Roof Flashing Components

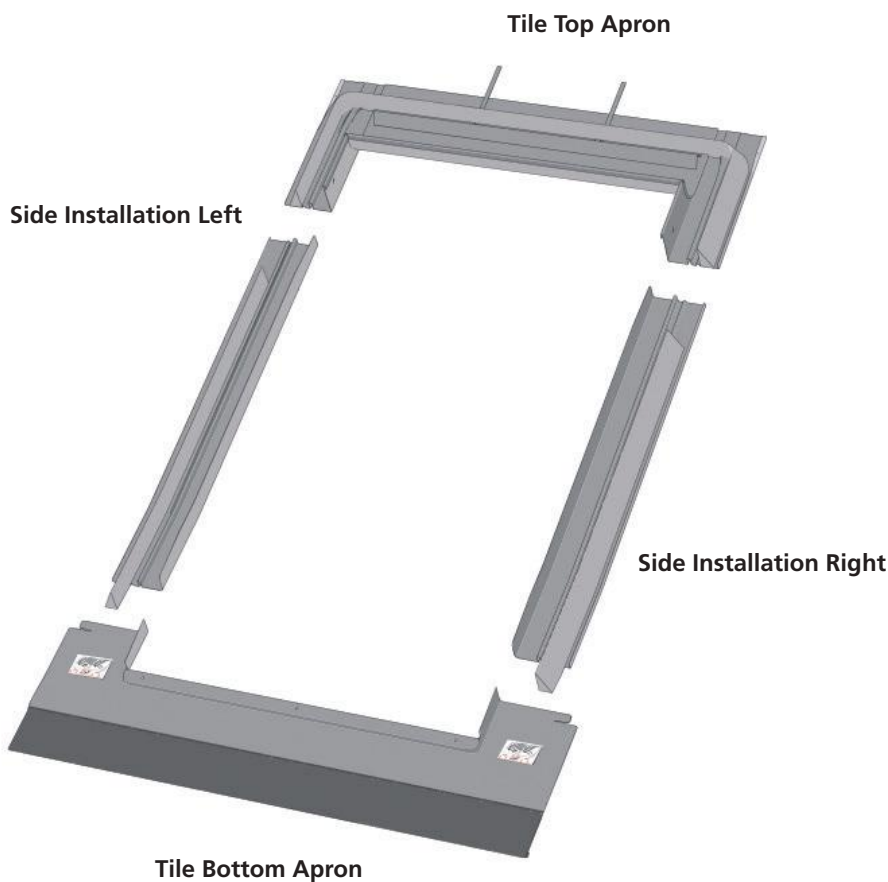


Tile Bottom Apron

### One-piece bottom apron

The unique one-piece bottom apron design improves aesthetic finish and allows for easy installation.


### Tile: TRF

- ▶ **Roof Pitch 20° – 90°**
- ▶ **Material Profile - Max 45 mm**  
Flashing for single window installation into interlocking profiled tiles or interlocking plain tiles.

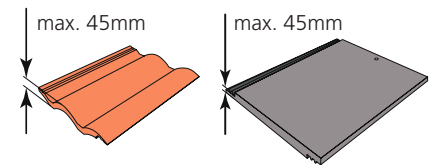

### Tile: DTRF

- ▶ **Roof Pitch 15° – 90°**
- ▶ **Material Profile – Max 90mm**  
Flashing for single window installation into flat or profiled interlocking tiles. Also suitable for interlocking slate and profiled sheeting.



### Guarantee

- ▶ **10 Years** - Keylite's hassle free guarantee Flashings.

### Finish Options

- ▶ Grey
- ▶ Conservation Black (CW)

### GB

Unit 3 Gateway Road, Burton Gateway,  
Burton upon Trent, DE13 8FL

T: +44 (0) 1283 200 158  
E: info@keyliteuk.com

### NI & ROI

Derryloran Industrial Est. Sandholes Road,  
Cookstown, Co. Tyrone, BT80 9LU

T: +44 (0) 28 8675 8921  
E: info@keylite.co.uk